

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/028775 A1

(51) International Patent Classification⁷: **E04D 1/36**
(21) International Application Number:
PCT/NZ2004/000224

(74) Agents: ADAMS, Matthew, D et al.; A J Park, 6th Floor
Huddart Parker Building, PO Box 949, Wellington, 6015
(NZ).

(22) International Filing Date:
17 September 2004 (17.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
528389 19 September 2003 (19.09.2003) NZ

(71) Applicant and

(72) Inventor: HAYNES, Andrew, Leo [NZ/NZ]; 3/7 Mably
Court, Stanmore Bay, Whangaparaoa (NZ).

(72) Inventors; and


(75) Inventors/Applicants (for US only): NICOLLS, Christo-
pher, John [NZ/NZ]; 160 Coronation Road, Glenfield,
Auckland (NZ). GIRDIU, Gabriel, Ioan [RO/NZ]; 4D
Coronation Road, Glenfield, Auckland (NZ). BUCKING-
HAM, Samuel, Gwy [NZ/NZ]; 3 Rubens Lane, West
Harbour, Auckland (NZ).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ROOF RIDGE FLASHING

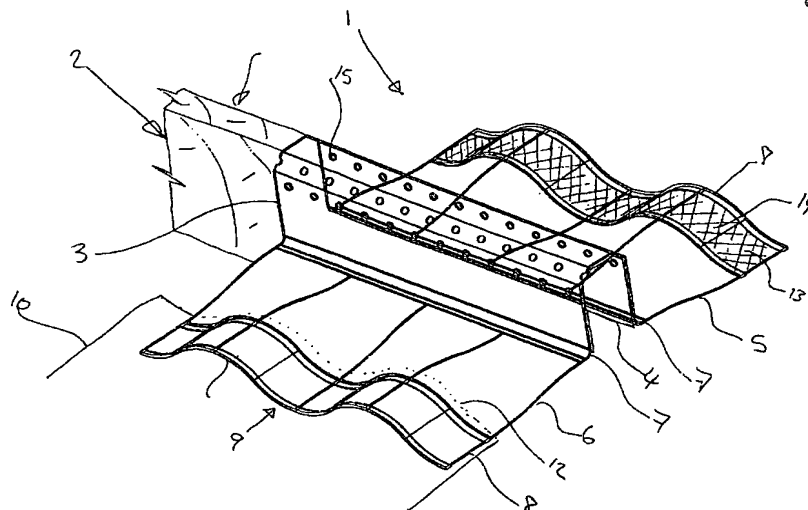

(57) Abstract: A roof flashing for or suitable for flashing a "ridgeline" as herein defined, the flashing being of multiple materials and being at least in part laminated and comprising or including a "ridge" overlying region to overlie the actual or phantom "ridge" to be flashed, the ridge being as herein defined, a first flanking region extending from the ridge overlying region, and a second flanking region extending from the ridge overlying region, wherein the ridge overlying region is conformable to a retainable three dimensional form and/or is conformable and can retain to a three dimensional form, and wherein the first and second flanking regions extend from the ridge overlying region so as to flank the actual or phantom "ridge" to be flashed by the flashing, and wherein there is a weathering surface of one or more weathering material(s) and at least one of the flanking regions has at least a partial underlying support of the weathering material(s).



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.